



CERAMIC GLAZED FLOOR TILES

600 x 600mm



Company Profile

ABROAD VITRIFIED is a leading manufacturer and exporter of high quality nano polished vitrified tiles. With a wide range of vitrified tiles, designed and produced in state of the art manufacturing unit at Morbi, India, the company is a force to reckon with.

It has been in business of supply of tiles of global quality, and have been successful in India as well as abroad. With a strong management vision and excellent execution, their brand is one of the most respected in the industry all across the globe.

www.abroadvitrified.com



**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**




15001



15002



15007

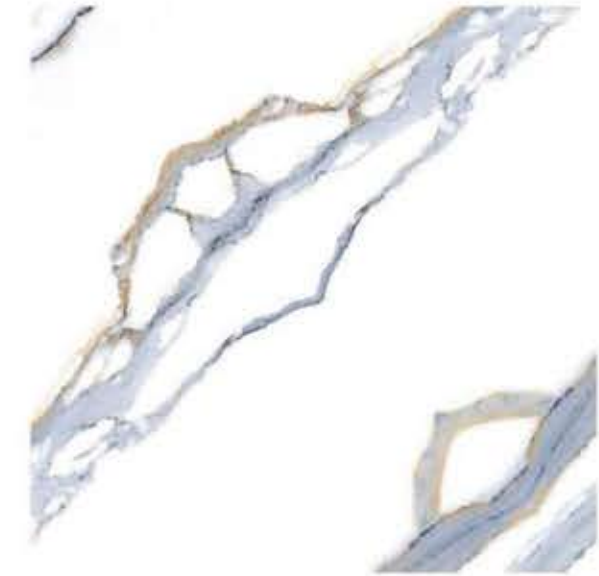

15008



15003




15004



15005



15006

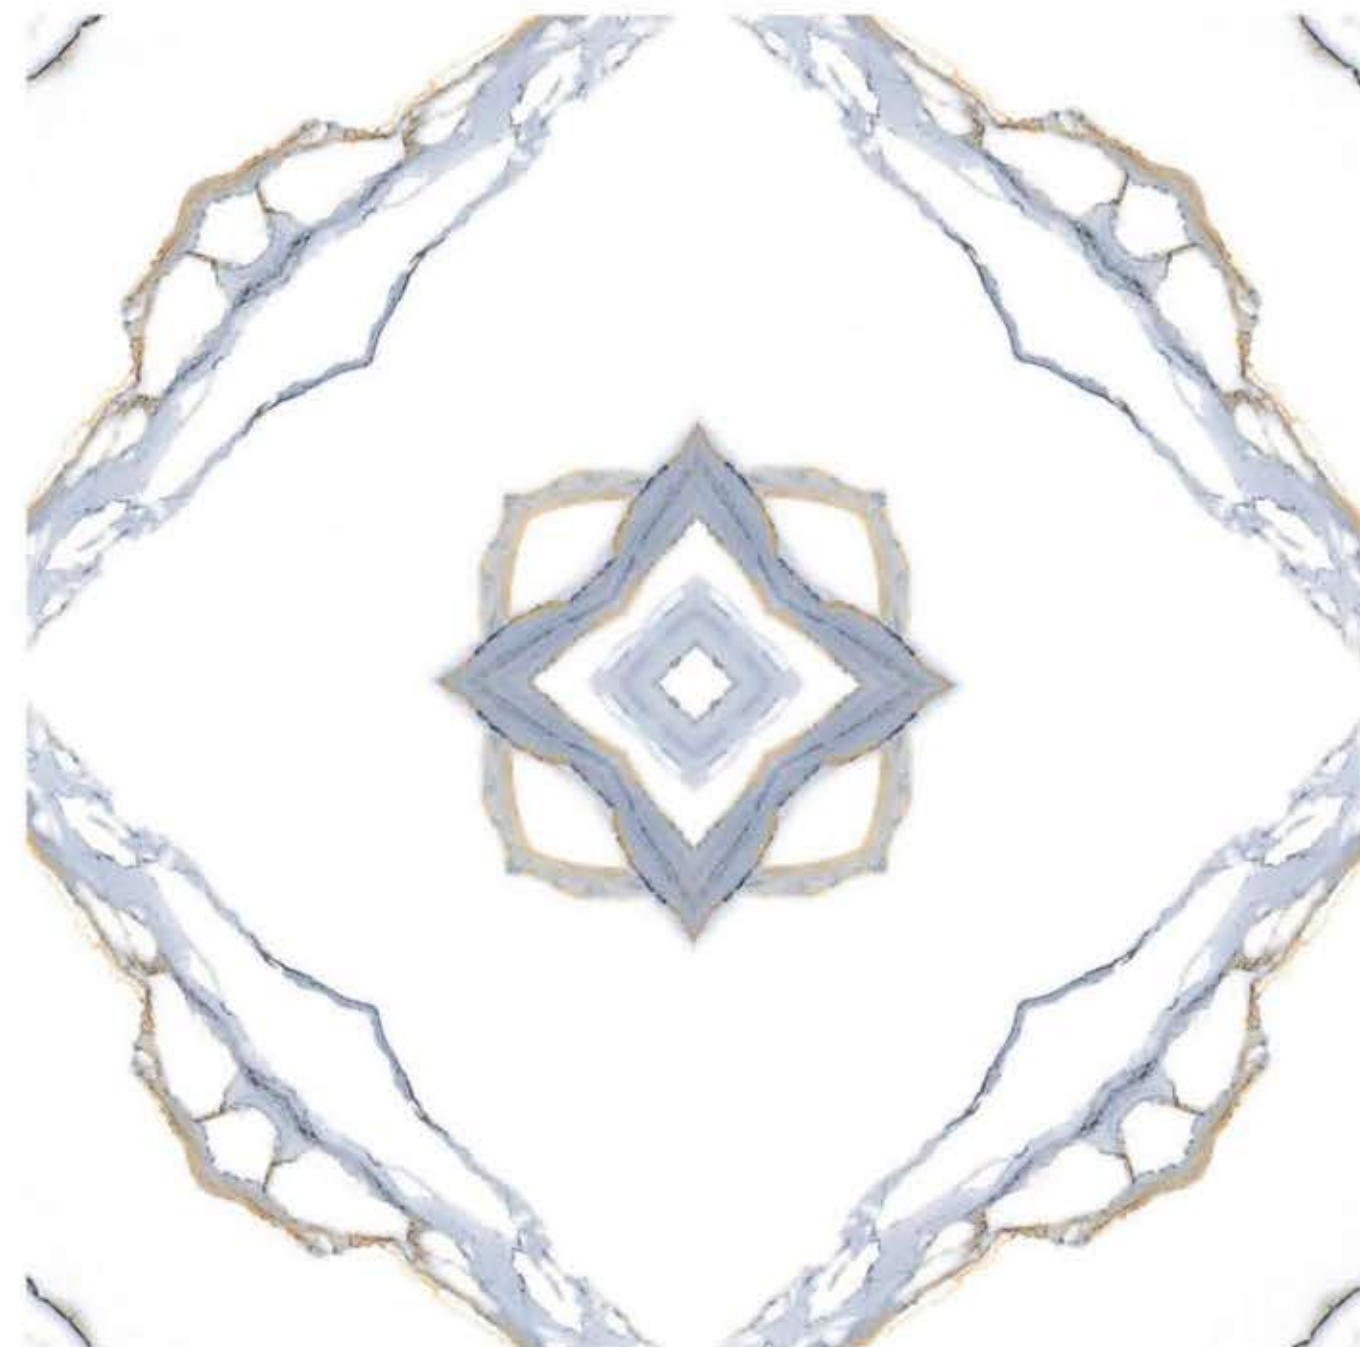



**MATT
SERIES**

APPLICATIONS



WHITE BODY
600MMx600MM
PORCELAIN TILES




15009




15010



15011

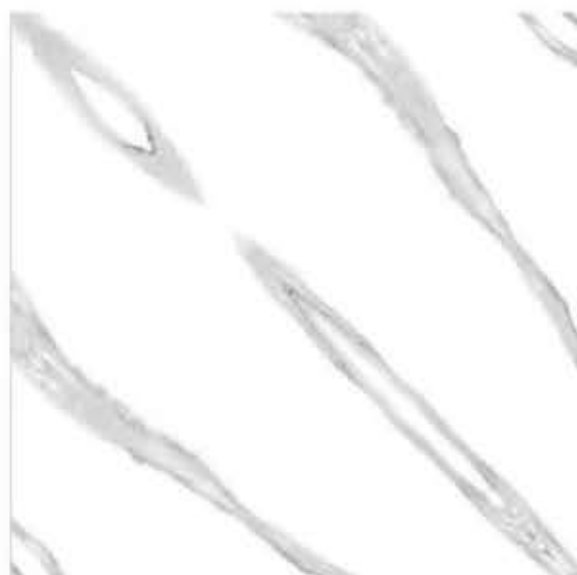

15012

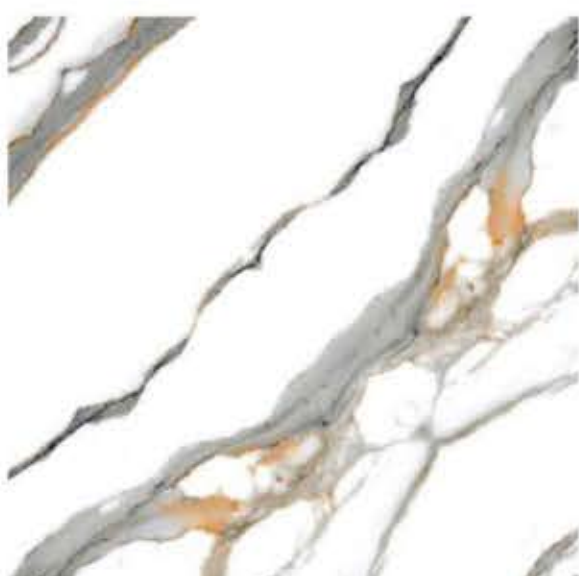

15013



15014





**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**



8131




8132



8133



8134

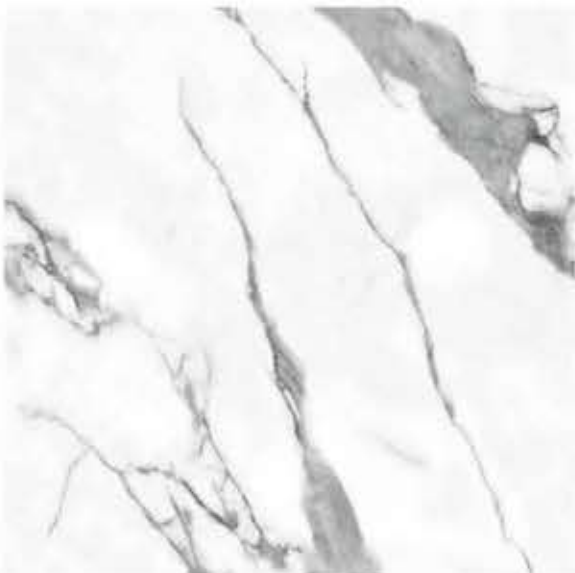

8135





**MATT
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**



8115



8116



8121



8122



8117



8118



8119



8120





**MATT
SERIES**

APPLICATIONS



WHITE BODY


**600MMx600MM
PORCELAIN TILES**



8123



8124

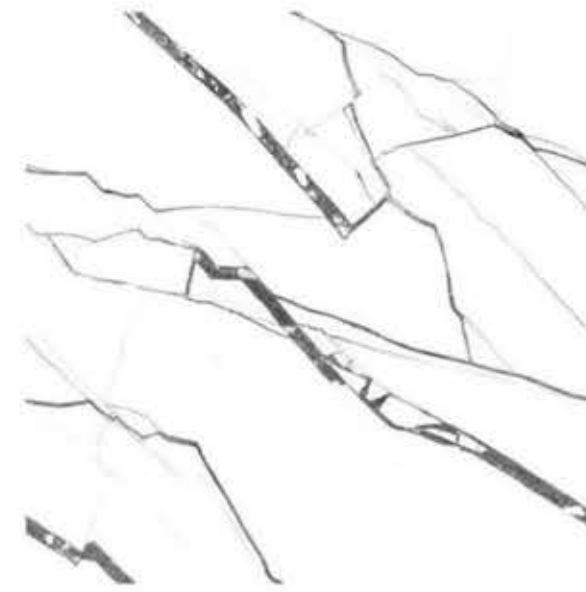

8129



8130



8125



8126



8127



8128





TECHNICAL SPECIFICATION

Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	± 3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	NIII	NIII	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAIL

Size	Thickness	No. of Tiles	Area Approx.	Weight Approx.
600 X 600 MM	9 MM	4 Pcs.	1.44 Sq. Mtr.	25 Kg.

UTILITY OF FLOOR TILES



GLOBAL PRESENCE



NEPAL | INDONESIA | U.A.E. | QATAR | MEXICO | U.K. | KENYA | CONGO | SENEGAL | MALI | LIBYA
GHANA | VIETNAM | BRAZIL | YEMEN | MADAGASCAR | DOMINICAN REPUBLIC | FIJI



ABROAD VITRIFIED PVT. LTD.

📍 Opp. Bela Village, Khokhra Hanuman Road, At. Bela, Pipli-Jetpar Road,
Tal. & Dist. Morbi-363642 (Guj.) INDIA.

📞 +91 99090 00771 / 99090 00772 / 99090 00776

✉️ abroadvitrified@gmail.com 🌐 www.abroadvitrified.com

Follow us

